


Key performance

- Ideal for packaging 4-color solid printing, UV inks
- Excellent half tone reproduction and ink transfer coverage
- High edge marking resistance
- Increased blanket lifetime

MAIN APPLICATION

Metal Decorating

Vulcan Pack UV is available in 3 ply, 1,96 mm thickness

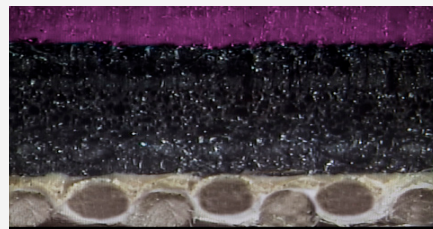

Vulcan Pack UV

✓ The product at a glance

INK COMPATIBILITY	UV
PRINTING SURFACE COLOUR	Purple
THICKNESS (mm)	1,96
AVERAGE LOAD VALUE N/cm2 @ 0,23 mm Indentation	400
SURFACE ROUGHNESS (Ra micron)	0,8
ELONGATION (%)	<0,9
TENSILE STRENGTH (N/mm)	>67

**FOR ANY FURTHER DETAILS AND FOR A QUOTATION
PLEASE REFER TO YOUR SALES MANAGER
OR EMAIL US AT: printingsm@trelleborg.com**