




Key performance

- Suitable for both conventional and UV inks
- Increased blanket lifetime
- Reduced downtime due to less blanket changes
- Improved ink release and cleaning

MAIN APPLICATION

Sheetfed

Vulcan Zenith is available in 3 ply, 1,96 mm thickness

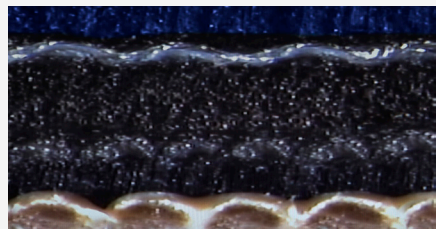

Vulcan Zenith

✓ The product at a glance

INK COMPATIBILITY	Hybrid
PRINTING SURFACE COLOUR	Blue
THICKNESS (mm)	1,96
AVERAGE LOAD VALUE N/cm² @ 0,23 mm Indentation	245
SURFACE ROUGHNESS (Ra micron)	1,2
ELONGATION (%)	<0,9
TENSILE STRENGTHS (N/mm)	>60
ADDITIONAL INFORMATION	
APPLICATIONS	Suitable for alternating printing (UV and conventional)

**FOR ANY FURTHER DETAILS AND FOR A QUOTATION
PLEASE REFER TO YOUR SALES MANAGER
OR EMAIL US AT: printingsm@trelleborg.com**