

vulcan® 714 Master


Key performance

- Long blanket lifetime
- High print quality
- Calibrated thickness
- Positive paper feed

MAIN APPLICATION

Heatset

Vulcan 714 Master is available in 3-ply, 1,71 mm thickness

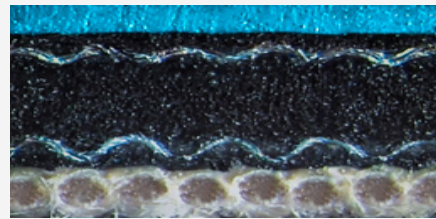

Vulcan 714 Master

✓ The product at a glance

| | |
|--|---|
| INK COMPATIBILITY | Conventional |
| PRINTING SURFACE COLOUR | Light Blue |
| THICKNESS(mm) | 1,71 |
| AVERAGE LOAD VALUE N/cm² @ 0,23 mm Indentation | 235 |
| SURFACE ROUGHNESS (Ra micron) | 1,0 |
| FEED FEATURES | Positive |
| ELONGATION (%) | <0,9 |
| TENSILE STRENGTH (N/mm) | >60 |
| WATER & SOLVENT PROTECTION | Yes |
| ADDITIONAL INFORMATION | |
| BLANKET CONSTRUCTION | The micro ground surface combined with a robust carcass construction results in a calibrated blanket tickness with a minimal relevance. |

**FOR ANY FURTHER DETAILS AND FOR A QUOTATION
PLEASE REFER TO YOUR SALES MANAGER
OR EMAIL US AT: printingsm@trelleborg.com**