

# vulcan<sup>®</sup> Alto ND2


## Key performance

- Excellent top face resistance
- Slightly positive paper feed
- High stability and versatility
- Long blanket lifetime
- High print quality

## MAIN APPLICATION

Commercial Web Heatset

Vulcan Alto ND2 is available in  
3/4-ply, 1,71/1,96 mm thickness

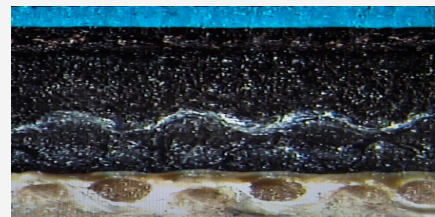

Vulcan Alto ND2

## ✓ The product at a glance

<b>INK COMPATIBILITY</b>	Conventional
<b>PRINTING SURFACE COLOUR</b>	Light Blue
<b>THICKNESS(mm)</b>	1,71/1,96
<b>AVERAGE LOAD VALUE N/cm<sup>2</sup> @ 0,23 mm Indentation</b>	240/250
<b>SURFACE ROUGHNESS (Ra micron)</b>	0,8
<b>FEED FEATURES</b>	Slightly Positive
<b>ELONGATION (%)</b>	<0,9
<b>TENSILE STRENGTH (N/mm)</b>	>60/>75
<b>WATER &amp; SOLVENT PROTECTION</b>	Yes
<b>ADDITIONAL INFORMATION</b>	
<b>APPLICATIONS</b>	Premium choice for heatset

**FOR ANY FURTHER DETAILS AND FOR A QUOTATION  
PLEASE REFER TO YOUR SALES MANAGER  
OR EMAIL US AT: [printingsm@trelleborg.com](mailto:printingsm@trelleborg.com)**