




**PRINTGRAPH®**

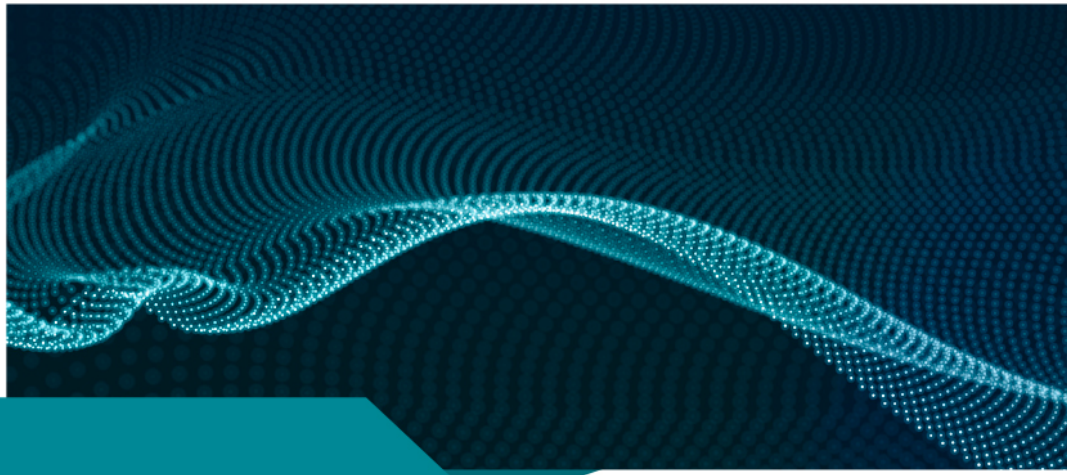

## Finito® Foil

### Main application


#### Lamination

Finito® Cold Foil is a special product developed for “cold Foil” application. The very low roughness of the top, which is obtained thanks of nanotechnology, giving to the product an high rub and scratch resistance



### Key Performance

- Excellent transfer property
- No Static Electricity
- Long life on press
- Flexible
- Mechanical resistance

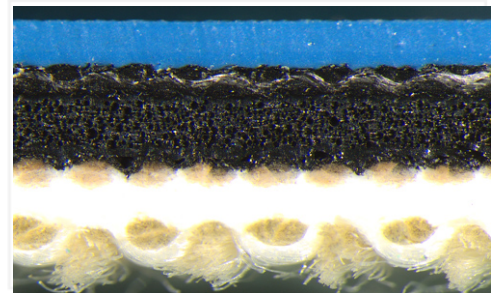

### Finito® Foil - Data sheet

NOMINAL THICKNESS	1,70 – 1.95
ELONGATION (%)	< 0.9
TENSILE STRENGTH (N/mm)	> 60
SURFACE COLOR	Blue
AVERAGE LOAD VALUE (N/cm <sup>2</sup> @0.23 mm indentation)	250
ADDITIONAL INFORMATION	
APPLICATIONS	Any Substrate

FOR ANY FURTHER DETAILS AND FOR A QUOTATION PLEASE REFER TO YOUR SALES MANAGER OR EMAIL US AT: [INFO@PRINTGRAPH.IT](mailto:INFO@PRINTGRAPH.IT)

[www.printgraph-group.com](http://www.printgraph-group.com)

The information contained in this document is intended to provide guidance. The information is NOT a specification and all figures in the document are nominal. This document and the information it contains do not create any warranties for any product and Printgraph Group disclaims any warranty of merchantability or fitness for a particular purpose for the product described in this document. This document discloses information that is proprietary to Printgraph Group. The receipt or possession of the document does not confer any right to reproduce or disclose the document, any information contained in it, or any physical article or device, or to practice any method or process except by written agreement with Printgraph Group. Printgraph Group is committed to the ongoing development of its products. For that reason, Printgraph Group reserves the right to alter the actual specifications of its products without prior notice.