



# Printec 134


## Key Performance

- Precisely ground and buffed quick release surface
- Unique, thicker compressible layer
- Conventional and Hybrid ink compatible
- Reduced piling and linting
- Uniform gauge
- Compressible construction
- Washes easily
- Defect-free surface

## MAIN APPLICATION

Sheetfed, Packaging

**Printec 134 is available in 3 ply  
1,96 mm thickness**

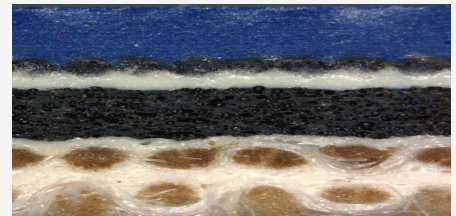

**Printec 134**



## The product at a glance

<b>INK COMPATIBILITY</b>	Hybrid
<b>PRINTING SURFACE COLOUR</b>	Blue
<b>THICKNESS (mm)</b>	1,96
<b>AVERAGE LOAD VALUE N/cm<sup>2</sup> @ 0,20 mm Indentation</b>	240
<b>SURFACE ROUGHNESS Ra (micron)</b>	1.2
<b>WATER &amp; SOLVENT PROTECTION</b>	No
<b>ADDITIONAL INFORMATION</b>	
<b>APPLICATIONS</b>	Improved ink release and cleaning

**FOR ANY FURTHER DETAILS AND FOR A QUOTATION  
PLEASE REFER TO YOUR SALES MANAGER  
OR EMAIL US AT: [printingsm@trelleborg.com](mailto:printingsm@trelleborg.com)**