PRINTGRAPH®

Finito® no•stop Hi-X
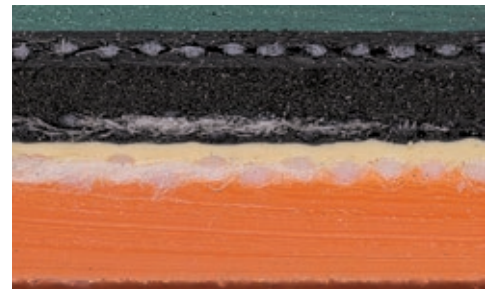
ISEGA CERTIFIED

Main application

Sheetfed – Commercial and Packaging

Finito® no•stop Hi-X is a special Blanket system, aiming to reduce the typical down time for Blanket change. Finito® no•stop Hi-X is suitable for all presses with an high undercut and it guarantees stability at high printing speed, mechanical resistance and ink transfer.

Key Performance

• Very quick to install
• Extremely stable on press at high speed
• Limited gauge loss
• Easy cleaning
• Long run
• pecific for absorbent substrate

Finito® no•stop Hi-X - Data sheet

CONSTRUCTION	3 ply with elastomeric layer
TOP SURFACE COLOR	Green
BOTTOM COLOR	Orange
PRINTING SURFACE	Hybrid compound for Conventional and UV Inks
PRINTING SURFACE FINISH	Micro-buffed
SURFACE ROUGHNESS Ra μ	0.9 ÷ 1.2
COMPRESSIBLE LAYER	Closed Cells
AVERAGE LOAD VALUE (N/cm² @0.23 mm indentation)	- 160
THICKNESS	From 2.70 to 3.45
HARDNESS (Shore A)	78
ADDITIONAL INFORMATION	
APPLICATIONS	For low grammage paper and carton board

FOR ANY FURTHER DETAILS AND FOR A QUOTATION PLEASE REFER TO YOUR SALES MANAGER OR EMAIL US AT: INFO@PRINTGRAPH.IT